


Plasterpol™ approved nails,
100 long, with approved Ø43
PVC washers

Selected Supercoat™
coating system

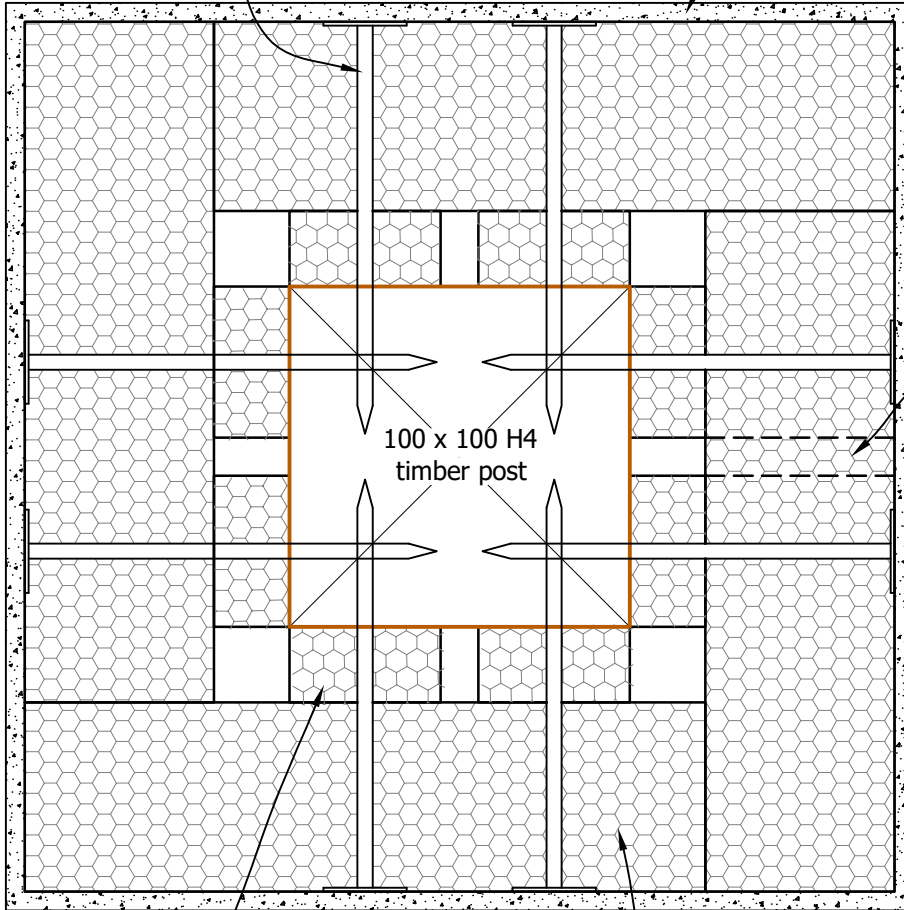

Drainage hole
required at bottom
of post (only
needed on one
side). To comply
with NZBC E2/AS1
clause 9.2.6c

20 x 40 EPS vertical
continuous cavity batten
(or 19 x 42 Cavibat
batten)

Plasterpol™ 50mm EPS panels



Title:

Timber Post Plan Detail

Date. February 2018

Detail No. PP 30-0

This drawing must be read in conjunction with the Plasterpol Drained & Ventilated Facade System Design Guide